




HN0321S02

HERIONOVA



PRODUCT FEATURES

Power usage	40 W
Power supply	24 Vdc
Light source	LED
Electrical connection	M12-T 4P Male
Color temperature	5000 K, CRI 80
Luminous flux	3600 lm
Efficiency	90 lm/W
Light beam angle	120°
Housing	Anodized aluminum
Front protection	Tempered glass
Protection index	IP67 (compatible with NEMA TYPE 12)
Impact resistance	IK06
Operating temperature	-20 °C to + 45 °C (-04 °F to +113 °F)
Weight	2,30 kg (5,07 lb)
Agency approvals	cURus in compliance with UL2108, CSA C22.2, CE, RoHs
Mounting	HNFX01, HNFX04, HNFX02

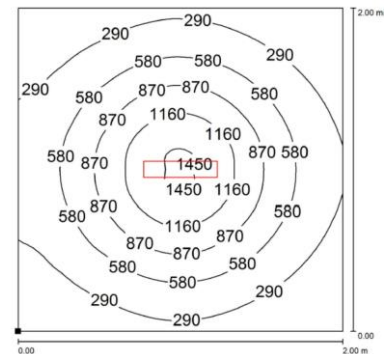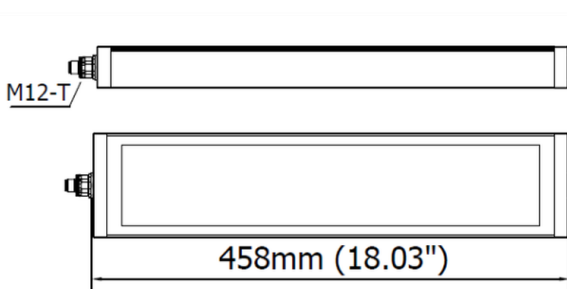

NOTE: Installation Height: 1m